







Fixtures for fluorescent lamps with a low light body and parabolic louver optical systems, which provide a possibility of designing optimal lighting. In all RAPID luminaires the consumption of electric energy is limited thanks to electronic ballasts. In comparison to traditional ones ignition takes place immediately and the work of light sources is steady, without blinking.




Index	Model	Light source	Power of light source	Lamp base	IP	Protection class	Louver	Electronic ballast
RAPID 114 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE11-14	RAPID 114PPE	linear fluorescent lamp T5	1 x 14W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE11-14	RAPID 114PRE	linear fluorescent lamp T5	1 x 14W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 214 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE12-14	RAPID 214PPE	linear fluorescent lamp T5	2 x 14W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE12-14	RAPID 214PRE	linear fluorescent lamp T5	2 x 14W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 314 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE13-14	RAPID 314PPE	linear fluorescent lamp T5	3 x 14W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE13-14	RAPID 314PRE	linear fluorescent lamp T5	3 x 14W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 414 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE14-14	RAPID 414PPE	linear fluorescent lamp T5	4 x 14W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE14-14	RAPID 414PRE	linear fluorescent lamp T5	4 x 14W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•

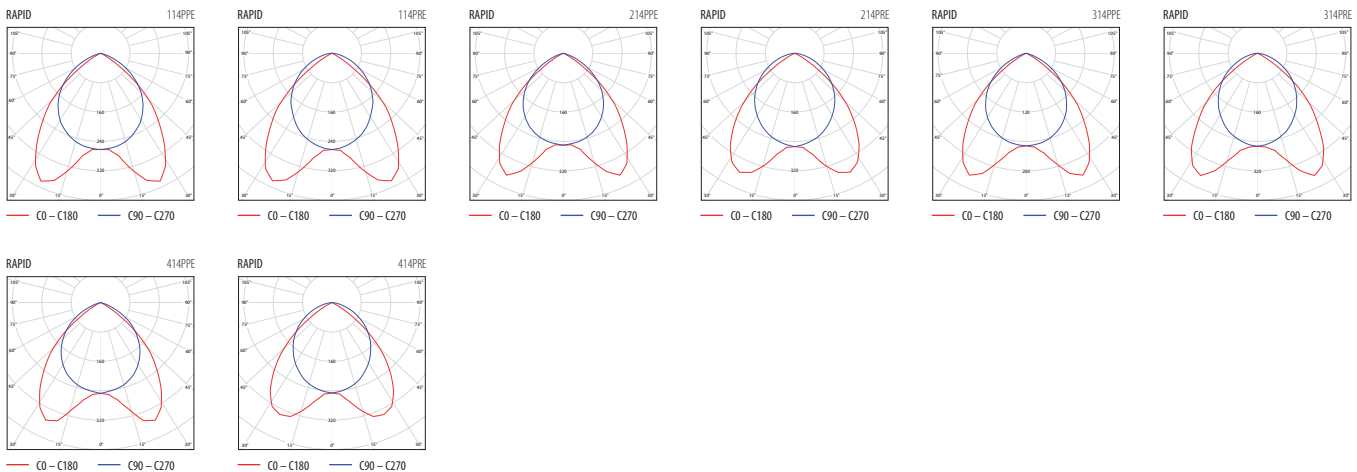


RAPID 114PPE, RAPID 114PRE



RAPID 214PPE, RAPID 214PRE

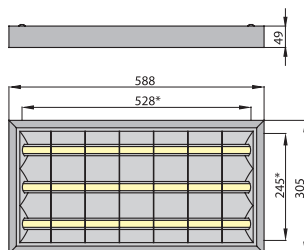

RAPID 314PPE, RAPID 314PRE





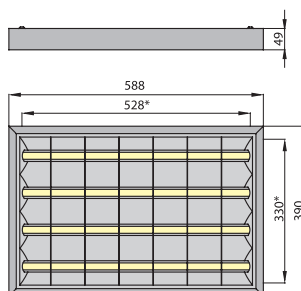


RAPID 414PPE, RAPID 414PRE

* distance between mounting holes





Index	Model	Light source	Power of light source	Lamp base	IP	Protection class	Louver	Electronic ballast
RAPID 121 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE11-21	RAPID 121PPE	linear fluorescent lamp T5	1 x 21W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE11-21	RAPID 121PRE	linear fluorescent lamp T5	1 x 21W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 221 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE12-21	RAPID 221PPE	linear fluorescent lamp T5	2 x 21W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE12-21	RAPID 221PRE	linear fluorescent lamp T5	2 x 21W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 321 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE13-21	RAPID 321PPE	linear fluorescent lamp T5	3 x 21W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE13-21	RAPID 321PRE	linear fluorescent lamp T5	3 x 21W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 421 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE14-21	RAPID 421PPE	linear fluorescent lamp T5	4 x 21W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE14-21	RAPID 421PRE	linear fluorescent lamp T5	4 x 21W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•

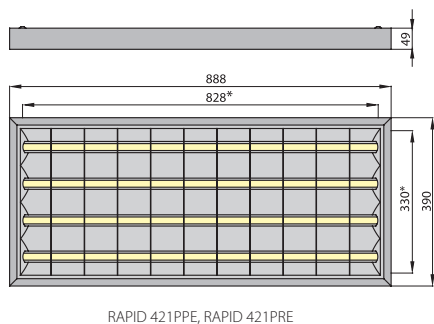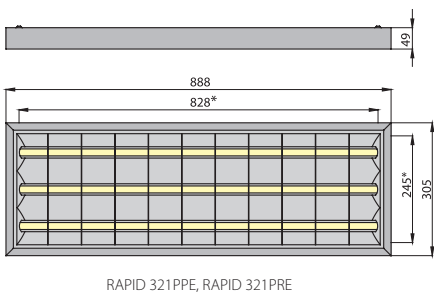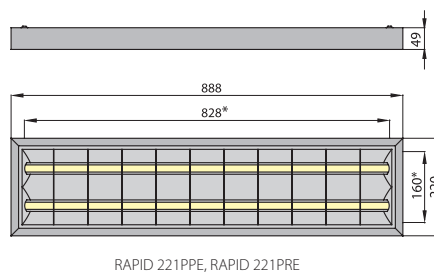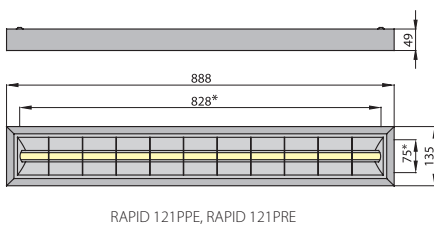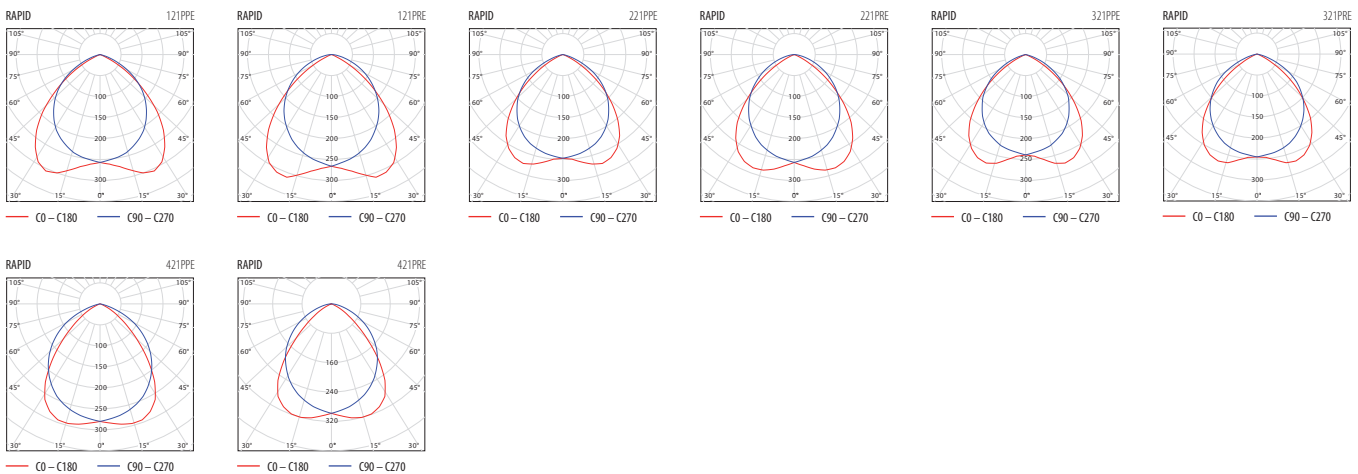


* distance between mounting holes




Index	Model	Light source	Power of light source	Lamp base	IP	Protection class	Louver	Electronic ballast
RAPID 128 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE11-28	RAPID 128PPE	linear fluorescent lamp T5	1 x 28W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE11-28	RAPID 128PRE	linear fluorescent lamp T5	1 x 28W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 228 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE12-28	RAPID 228PPE	linear fluorescent lamp T5	2 x 28W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE12-28	RAPID 228PRE	linear fluorescent lamp T5	2 x 28W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 328 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE13-28	RAPID 328PPE	linear fluorescent lamp T5	3 x 28W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE13-28	RAPID 328PRE	linear fluorescent lamp T5	3 x 28W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•
RAPID 428 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE14-28	RAPID 428PPE	linear fluorescent lamp T5	4 x 28W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•
YR-RPRE14-28	RAPID 428PRE	linear fluorescent lamp T5	4 x 28W	G5	IP 20	I	closed parabolic louvers; grooved crossbars	•

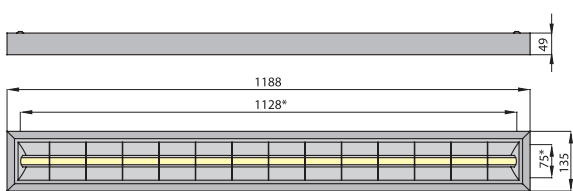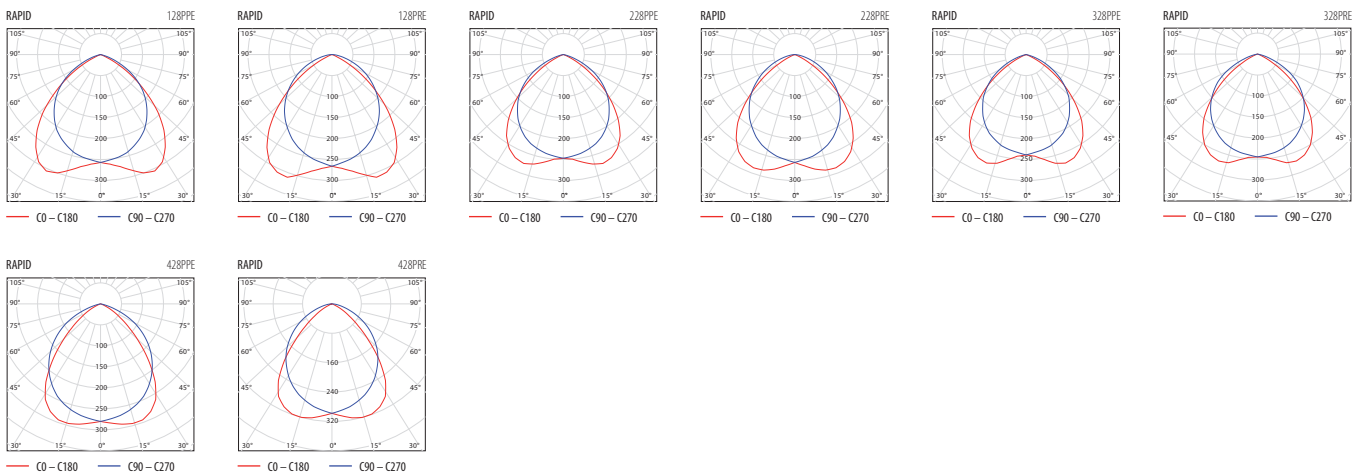


RAPID 128PPE, RAPID 128PRE

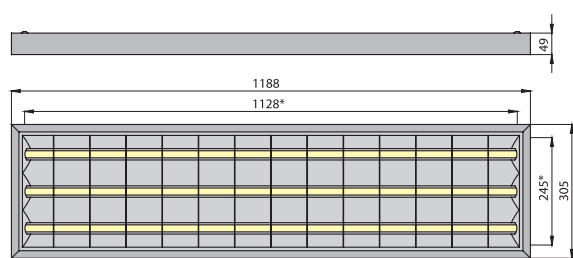

RAPID 328PPE, RAPID 328PRE

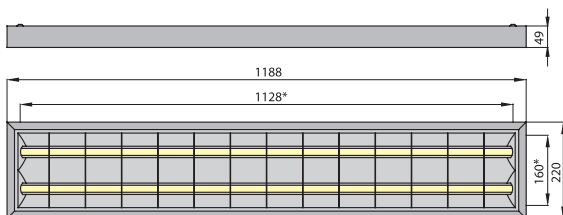



RAPID 228PPE, RAPID 228PRE

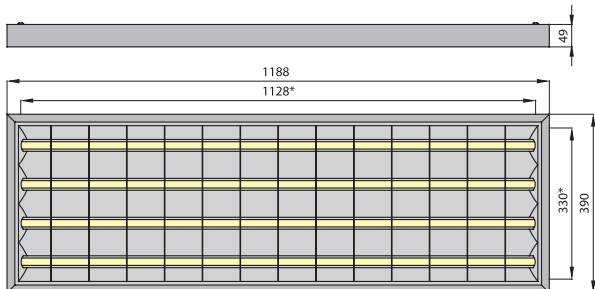

RAPID 428PPE, RAPID 428PRE

* distance between mounting holes

Index	Model	Light source	Power of light source	Lamp base	IP	Protection class	Louver	Electronic ballast
RAPID 254 Indoor louver luminaire with electronic ballast, surface mounted or suspended								
YR-RPPE12-54	RAPID 254PPE	linear fluorescent lamp T5	2 x 54W	G5	IP 20	I	closed parabolic louvers; parabolic crossbars	•

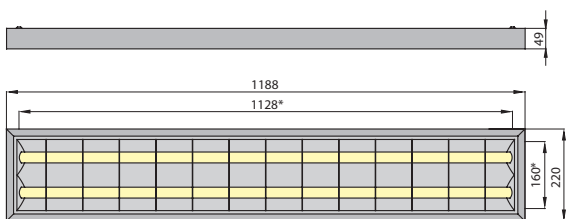

* distance between mounting holes



RAPID Accessories

YR-RAPW20-10	Straight connector W2	Straight connector for luminaires 2 x. RAPID - for joining luminaires in lines
YR-RAPW2R-10	Connector with reflector W2R	Connector with reflector for luminaires 2 x. RAPID - for joining luminaires in lines
YI-PK1Z00-00	Cable bushing PK-1Z	Cable bushing - for joining luminaires in lines
YI-ZL1N12-10	Cord pendant, bearing ZL-1N	Cord pendant, bearing
YI-ZL1Z12-10	Cord pendant, power supplying ZL-1Z	Cord pendant, power supplying
YI-TWLR18-00	Connection set TWL-R18	Connection set for joining luminaires RAPID ...x 18W, ...14W in lines
YI-TWLR36-00	Connection set TWL-R36	Connection set for joining luminaires RAPID ...x 36W, ...x 21W, ...x28 in lines



W2



W2R



ZL-1N



ZL-1Z